



We believe in a world that lasts forever

Outokumpu is a global leader in the advanced materials business, creating stainless steels that are efficient, long lasting, and recyclable. A strong customer focus, sustainability, and technical excellence are at the heart of everything we do.

As an open and approachable company, our customers rely on our advice to help them select products that will deliver the best long-ten performance for their needs.

With over a century of innovation behind us and some of the best minds in the business, we continue to develop pioneering materials to meet the demands of tomorrow.

The durability of stainless steel means that it is not only the best, but also the most economically sugainable choice for a wide range of applications. All of our products are made from an average of 85% recycled material and are fully recyclable at the end of their lifecycles.

Together with our customers and partners, we are building a world that lasts forever.

Stay up to date on our latest innovations, follow market trends, and get inspired by success stories – subscribe to our magazines and newsletters outokumpu.com/newsletter

The inside view

For mildly corrosive environments (PRE up to 17).

Outokumpu's legacy of innovation and consistent quality means we have the right product for every application. By grouping our products into ranges based on performance, rather than stainless steel type, we aim to make choosing the best product for your application easier.

Moda range products are designed for applications in mildly corrosive environments, with a Pitting Resistance Equivalent (PRE) value of up to 17. This range contains our key product Moda 430/4016 as well as several alternatives and low-chromium options.




Outokumpu has decades of experience in creating and developing the products in the Moda range.

The Moda range is made up of ferritic stainless steels that give you good formability and attractive surface finishes, and which are widely used in applications ranging from cutlery and appliances to elevators.

Outokumpu has decades of experience in creating and developing the products in the Moda range. We've invested a great deal of time and research refining the appearance and corrosion resistance of our materials with industry-leading surface finishes.

Moda range products are readily available around the globe and are delivered from mills that are well known for their quality and on-time delivery accuracy. You can depend on Outokumpu stainless steels to reliably and consistently meet the specifications that your application demands.

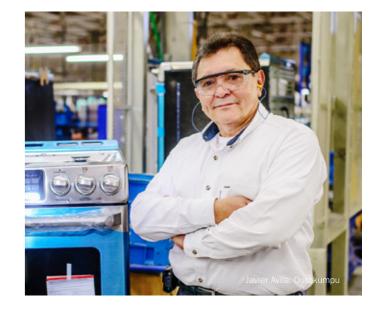

Our customers also rely on us to deliver the best material selection advice, and we can often find more cost-effective solutions that help you to avoid over-specifying.

Contact us at **outokumpu.com/contacts** to find out which of out products is right for your next project.



The Pitting Resistance Equivalent (PRE) number can be used to compare the resistance of different stainless steels to pitting corrosion. It takes into account the effect of the most important alloying elements.

Choosing the right product

Choosing the right stainless steel for the application is key to ensuring both the cost effectiveness and success of your project. Take a look at the individual Moda range products – and the applications they are best suited for – to get an idea of your options.

Key product

Moda 430/4016

A classic 16% chromium ferritic stainless steel used in mildly corrosive environments.

Typical applications

- Kitchen equipment
- Household appliances
- Sinks
- Flanges and valves

Product forms

C, H, B, R, S

Product forms



C Cold rolled coil and sheet







P Duarto plate



B Bar



Wire rod

S
Semifinished
(bloom, billet, ingot & slab)



k slah)

Moda range applications

Common applications include:

- Washing machines
- Dishwashe
- Sink
- Counter tops
- Cooker hoods
- Refrigerators
- Tableware and cutlery
- Ice machines
- Indoor cladding
- Grills
- Elevators
- Bus chassis
- Fins for heat exchangers
- Automotive exhaust systems
- Railroad cars
- Oil process equipment (mildly corrosive environments)
- Coins

Contact us at **outokumpu.com/contacts** to find out which of our products is right for your next project.



If your application requires more corrosion resistance, try a product from the Outokumpu Core range.

Alternatives

Outokumpu name	Typical applications	Product forms	
Moda 4511 A niobium-stabilized 16% chromium ferritic steel with improved formability and weldability compared to Moda 430/4016.	Welded parts Food processing industry equipment	C, H, S	
Moda 439/4510 A titanium-stabilized 17% chromium ferritic steel with improved corrosion resistance, formability, and weldability compared to Moda 430/4016.	Automotive exhaust systems Sugar industry equipment Household appliances	C, H, S	
Moda 439M Very similar to Core 441/4509, with double stabilization for a more even surface appearance and enhanced weldability. With 1% more chromium, it also has slightly better corrosion resistance.	Automotive exhaust systems Sugar industry equipment Household appliances	С, Н	
Moda 430Ti/4520 An alternative to Moda 430/4016 with better formability and weldability for stamping, drawability applications, and complex shapes.	Counter tops Flue induction connectors Automotive applications	C, H, S	
Moda 4589 A 1.4% chromium product with a small amount of niobium for elevated strength, making it suitable for structural parts exposed to loads that demand higher yield points.	Conveyor chains Railroad cars	C, H, S	

Low-chromium alternatives


Our low-chromium stainless steels offer better corrosion resistance than carbon steels in mildly corrosive environments.

Outokumpu name	Typical applications	Product forms
Moda 410L/4003 A weldable ferritic stainless steel with elevated yield strength and resistance to abrasion. Its better corrosion resistance compared to carbon steels enables lower maintenance costs and longer service life.	 Railroad and road vehicles Shipping containers Industrial applications Mining conveyors 	C, H, P, S
Moda 409/4512 A weldable ferritic stainless steel with good oxidation resistance in dry air. This product is also available as low-carbon Moda 409L.	Automotive applications Industrial exhaust systems	C, H, S
Moda 410S/4000 A 13% chromium general-purpose stainless steel that is used widely where corrosion is not severe. When supplied in the age hardened condition Moda 410S/4000 can be used where moderate corrosion resistance and higher strength is required, while retaining its machinability.	Bearings Bushings Dies Fasteners Pump shafts Valves and valve components	C, H, P, S

6 7

Product performance comparison

Strength vs. corrosion resistance

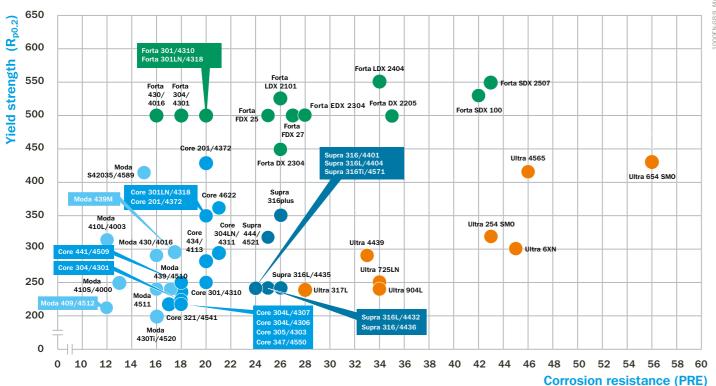

Moda – Mildly corrosive environments (PRE up to 17)

Core – Corrosive environments (PRE 17 to 22)

Supra – Highly corrosive environments (PRE 22 to 27)

Forta – Duplex and other high strength (PRE 18 to 43)


Ultra – Extremely corrosive environments (PRE > 27)

PRE calculation = %Cr + 3.3 x % Mo + 16 x %N

Note: PRE values shown are Outokumpu typical values. Yield strength ($R_{\text{po.2}}$) according to EN 10088-2 minimum values for cold rolled strip. Yield strength for temper rolled products ranges from 500-2000 MPa.

For more values by product, please see steelfinder.outokumpu.com

Elongation vs. corrosion resistance

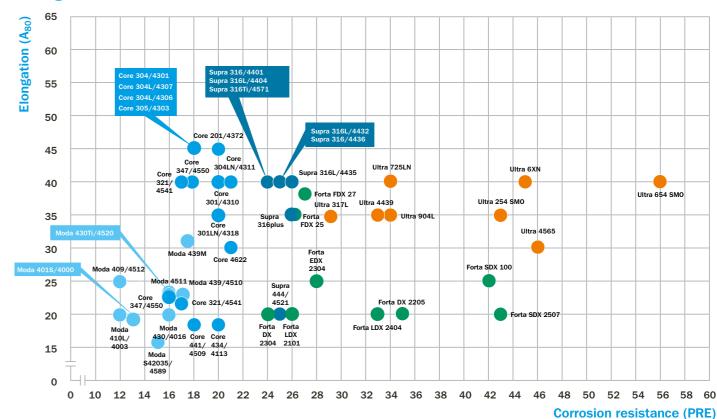

Moda – Mildly corrosive environments (PRE up to 17)

Core - Corrosive environments (PRE 17 to 22)

Supra – Highly corrosive environments (PRE 22 to 27)

Forta - Duplex and other high strength (PRE 18 to 43)

Ultra – Extremely corrosive environments (PRE > 27)

PRE calculation = %Cr + 3.3 x % Mo + 16 x %N

Note: PRE values shown are Outokumpu typical values. Elongation (A_{80}) according to EN 10088-2 minimum values for cold rolled strip.

For more values by product, please see steelfinder.outokumpu.com



8

Product properties

Moda	rar	nge		Mild	Mildly corrosive environments (PRE up to 17)								
Steel designations					Performance				Typical chemical composition, % by mass				
		ASTM			A ₈₀	R _{00.2}	Grade						
Outokumpu name	EN	Туре	UNS	PRE		MPa			Cr		Mo		Others
Moda 430/4016	1.4016	430	S43000	16	20	280	F	0.05	16.2	-	-	-	-
Alternatives													
Moda 4511	1.4511	-	=	16	23	240	F	0.02	16.2	=	_	-	Nb
Moda 439/4510	1.4510	439	S43035	17	23	240	F	0.02	17.0	-	-	-	Ti
Moda 439M	-	439M	S43932	17.5	31	290	F	0.014	17.6	_	_	-	Nb Ti
Moda 430Ti/4520	1.4520	430Ti	-	16	24	200	F	0.02	16.2	-	_	-	Ti
Moda 4589	1.4589	-	S42035	15	16	420	F	0.045	14.0	1.65	0.25	-	Ti
Low-Cr alternatives													
Moda 410L/4003	1.4003	410L	S40977	12	20	320	F	0.02	11.5	0.5	_	-	=
Moda 409/4512	1.4512	409	-	12	25	220	F	0.02	11.5	0.2	-	-	Ti
Moda 410S/4000	1.4000	410S	S41008	13	19	250	F	0.03	12.5	-	-	-	-

Note: figures shown are EN 10088-2 minimum values for cold rolled strip for elongation (A_{g0}), tensile strength (R_m), and yield strength ($R_{p0.2}$). Chemical compositions are Outokumpu typical values.

For specific values by product, please see steelfinder.outokumpu.com

Moda range products are available with the following surface finishes: 1, 2B, 2D, 2E, and Deco range special surfaces.

Stainless steel types

Ferritic stainless steels have good resistance to corrosion, especially stress-corrosion cracking. Lower carbon and nitrogen contents, together with niobium and/or titanium stabilization, improve both weldability and toughness. Ferritic stainless steels are magnetic.



Working towards forever.

We work with our customers and partners to create long lasting solutions for the tools of modern life and the world's most critical problems: clean energy, clean water, and efficient infrastructure. Because we believe in a world that lasts forever.

outokumpu classic

Moda

Mildly corrosive environments Core

Corrosive environments Supra

Highly corrosive environments

outokumpu pro

Forta

Duplex & other high strength Ultra

Extremely corrosive environments

Dura

High hardness Therma

High service temperatures

Prodec

Improved machinability

Deco

Special surfaces



Information given in this brochure may be subject to alterations without notice. Care has been taken to ensure that the contents of this publication are accurate but Outokumpu and its affiliated companies do not accept responsibility for errors or for information which is found to be misleading. Suggestions for or descriptions of the end use or application of products or methods of working are for information only and Outokumpu and its affiliated companies accept no liability in respect thereof. Before using products supplied or manufactured by the company the customer should satisfy himself of their suitability.

MODA, CORE, SUPRA, FORTA, ULTRA, DURA, THERMA, DECO, 316PLUS and 153 MA are trademarks of Outokumpu Oyj.

PRODEC, EDX, FDX, FDX 25, FDX 27, LDX, 253 MA, 254 SMO, 654 SMO, LDX 2101, LDX 2404 are registered trademarks of Outokumpu Oyj.